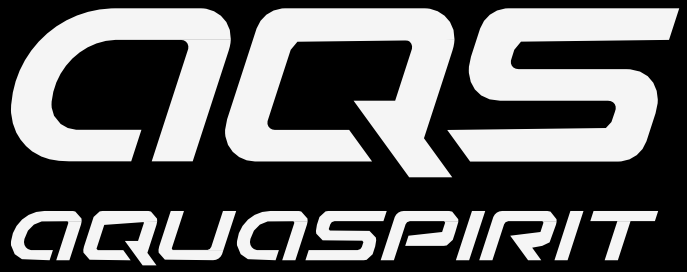
AQS
AQUASPIRIT

# AQUASPIRIT

Company AQUASPIRIT
created in 2017, based on
the rich experience of its founders in
the production of boats and the desire to implement
this experience in an ideal product.

The main goal set by our company is to let everyone who appreciate active rest feel the true spirit of the water! Therefore, we continuously work to build the highest quality boats and meet the requirements of our customers.

AQUASPIRIT.COM.UA

AQUASPIRIT

# SPIRIT 585

NEW 2020

AQUASPIRIT

# 585 CC, 585DC

NEW 2020

| | |
|---|---|
| LOA, m | 5,85 |
| Cockpit length, m | 4 |
| Beam, m | 2,45 |
| Width of cockpit, m | 1,76 |
| Diameter of D-tube, m | 0,5 D |
| Deadrise on transom | 21,5° |
| Load Capacity, kg | 1050 |
| Passenger-carrying capacity, ppl | 8 |
| Number of sections in tubes, pcs | 5 |
| Recommended engine power, kW/hp | 85/115 |
| Maximum engine power, kW/hp | 110/150 |
| Length of engine shaft, inches/mm | 25/635 (XL) |
| Tube material: PVC or Hypolon, g/m2 | 1300 |
| Hull material: Aluminum Alloy | EN AW 5083 H111 |
| Boat category | C |

AQUASPIRIT

# 585CC 585DC

NEW 2020

AQUASPIRIT

# SPIRIT 450C

| | |
|---|---|
| LOA, m | 4,424 |
| Cockpit length, m | 3,422 |
| Beam, m | 2,138 |
| Width of cockpit, m | 1,121 |
| Diameter of tube max, m | 0,5 |
| Weight, kg | 265 |
| Load capacity, kg | 750 |
| Passenger-carrying capacity, ppl | 6 |
| Number of sections in tubes, pcs | 5 |
| Engine power max, h.p. | 75 |
| Length of engine shaft, inches | 20 |
| Tube material: PVC or Hypolon, g/m2 | 1000 |
| Hull material: Aluminum Alloy | EN AW 5083 H111 |

AQUASPIRIT

# SPIRIT 450C

AQUASPIRIT

# SPIRIT 450

AQUASPIRIT

# SPIRIT 350S

| | |
|---|---|
| LOA, m | 3,48 |
| Cockpit length, m | 2,62 |
| Beam, m | 1,68 |
| Width of cockpit, m | 0,834 |
| Diameter of tube max, m | 0,43 |
| Weight, kg | 100 |
| Load capacity, kg | 504 |
| Passenger-carrying capacity, ppl | 3 |
| Number of sections in tubes, pcs | 3 |
| Engine power max, h.p. | 20 |
| Length of engine shaft, inches | 15 |
| Tube material: PVC or Hypolon, g/m2 | 1000 |
| Hull material: Aluminum Alloy | EN AW 5083 H111 |

AQUASPIRIT

# SPIRIT 350C

| | |
|---|---|
| LOA, m | 3,48 |
| Cockpit length, m | 2,62 |
| Beam, m | 1,68 |
| Width of cockpit, m | 0,834 |
| Diameter of tube max, m | 0,43 |
| Weight, kg | 98 |
| Load capacity, kg | 506 |
| Passenger-carrying capacity, ppl | 4 |
| Number of sections in tubes, pcs | 3 |
| Engine power max, h.p. | 20 |
| Length of engine shaft, inches | 15 |
| Tube material: PVC or Hypolon, g/m2 | 1000 |
| Hull material: Aluminum Alloy | EN AW 5083 H111 |

AQUASPIRIT

# SPIRIT 320

| | |
|---|---|
| LOA, m | 3,15 |
| Cockpit length, m | 2,28 |
| Beam, m | 1,68 |
| Width of cockpit, m | 0,834 |
| Diameter of tube max, m | 0,43 |
| Weight, kg | 71 |
| Load capacity, kg | 441 |
| Passenger-carrying capacity, ppl | 4 |
| Number of sections in tubes, pcs | 3 |
| Engine power max, h.p. | 15 |
| Length of engine shaft, inches | 15 |
| Tube material: PVC or Hypolon, g/m2 | 1000 |
| Hull material: Aluminum Alloy | EN AW 5083 H111 |

AQUASPIRIT

# SPIRIT 320

AQUASPIRIT

# SPIRIT 290

| | |
|---|---|
| LOA, m | 2,88 |
| Cockpit length, m | 2,01 |
| Beam, m | 1,59 |
| Width of cockpit, m | 0,78 |
| Diameter of tube max, m | 0,36 |
| Weight, kg | 62 |
| Load capacity, kg | 389 |
| Passenger-carrying capacity, ppl | 3 |
| Number of sections in tubes, pcs | 3 |
| Engine power max, h.p. | 10 |
| Length of engine shaft, inches | 15 |
| Tube material: PVC or Hypolon, g/m2 | 1000 |
| Hull material: Aluminum Alloy | EN AW 5083 H111 |

AQUASPIRIT

«AQUASPIRIT»
Official Distributor

SUNLIGHT YACHTS S.L.
Club de Mar
s/n, Muelle Pelaires,
07015 Palma, Balearic Islands

www.cool-boats.com
www.aquaspirit.com.ua